

SUPER STAR PLUS MR400

MODULAR ICE CUBE MACHINE



THREE PHASE
220/60



FEATURES CARACTERÍSTICAS

- ▶ **PRODUCES SOLID CRYSTAL CLEAR ICE CUBES**
PRODUCE CUBITOS MACIZOS Y CRISTALINOS
- ▶ **MACHINE WITH BIGGEST PRODUCTION IN ITS RANGE**
LA MÁQUINA DE MAYOR PRODUCCIÓN EN SU SEGMENTO
- ▶ **LOWEST ELECTRICITY CONSUMPTION, ONLY 18 KWH/100 KG ICE (DATA WITH 60 GR CUBE SIZE). THAT MEANS UNTIL 24% ELECTRICITY COST REDUCTION VS. OTHER MODELS IN THE MARKET**
EL MÁS BAJO CONSUMO ELÉCTRICO, SÓLO 18 KWH/100 KG DE HIELO (DATO MEDIDO CON EL CUBITO DE 60 GR). ESTO SUPONE UN GASTO DE ELECTRICIDAD HASTA UN 24% INFERIOR A OTROS MODELOS DEL MERCADO
- ▶ **LOWEST WATER CONSUMPTION, ONLY 1,68 L/KG ICE. THAT MEANS UNTIL 35% WATER COST REDUCTION VS. OTHER MODELS IN THE MARKET**
EL MÁS BAJO CONSUMO DE AGUA, SÓLO 1,68 L/KG HIELO. ESTO SUPONE UN 35% DE REDUCCIÓN DE GASTO EN AGUA RESPECTO A OTRAS MÁQUINAS DEL MERCADO
- ▶ **ELECTRONIC CONTROL MACHINE. IT ADAPTS CONTINUOUSLY TO ANY VARIATION OF AMBIENT AND WATER TEMPERATURES: ICE CUBES ARE ALWAYS IDENTICAL**
MÁQUINA CON CONTROL ELECTRÓNICO. SE ADAPTA CONTINUAMENTE A CUALQUIER VARIACIÓN DE TEMPERATURA AMBIENTE O DEL AGUA: LOS CUBITOS SON SIEMPRE IDÉNTICOS
- ▶ **EXTERNAL WARNING LIGHTS. EVERY OPERATION IS UNDER CONTROL**
TESTIGOS LUMINOSOS DE ALARMA. CADA OPERACIÓN SE TIENE BAJO CONTROL
- ▶ **CLEANING SWITCH ALLOWS AN EASY CLEANING TASK EL**
BOTÓN DE LIMPIEZA PERMITE UNA TAREA DE LIMPIEZA FÁCIL



						
SUPER STAR PLUS MR 400 A		372	350	Width 1.321 Depth 638 Height 978	Width 1.410 Depth 740 Height 1.115	S. STAR PLUS 60gr 46 (H) x 49 mm (H) *Average dimensions Dimensiones promedio
SUPER STAR PLUS MR 400 W		-	-			

ACCESSORIES ACCESORIOS

INCLUDED




OPTIONAL (NOT INCLUDED)




RECOMMENDED BINS SILOS RECOMENDADOS




RIGHT SIDE VIEW
VISTA LATERAL DERECHA




FRONTAL VIWE
VISTA FRONTAL

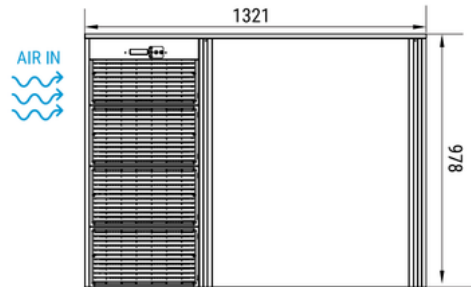

REAR VIEW
VISTA TRASERA

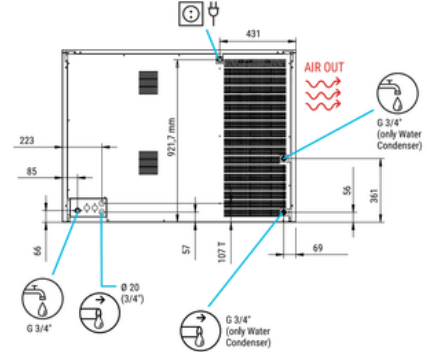

CENTRAL CROSS SECTION
VIEW OF THE BASE
VISTA DE LA BASE DESDE
SECCIÓN CENTRAL

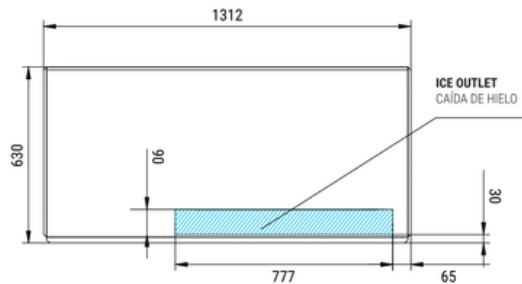

OPERATING CONDITIONS CONDICIONES DE OPERACIÓN

PRODUCTION 60Hz PRODUCCIÓN 60 Hz


±10% V

10°C/43°C

5°C/38°C

1 bar/6 bar

192 Ice cubes/ cycle



V	Hz	ph
220	60	3N



DELTA NG60AIR COOLED

°C	10°	15°	21°	30°
°F	50°	60°	70°	86°
10°	372	357	327	297
50°	362	350	317	287
21°	347	332	304	257
68°	302	287	257	222
32°				
90°				
43°				
109°				

MODELS MODELOS

SUPER STAR PLUS MR400 A

SUPER STAR PLUS MR400 W

 ASHRAE CONDITIONS CONDICIONES ASHRAE	 (W) (BTu/h)	 (W) 43°C	 (n.) (mm²)	 FUSE	 (Kwh)	 (l/h)	 (W) (BTu/h)	 (Kg)	 (Kg)	 (m³)
	11.786 42.215	3.100	5 2,5	25	20,7	26,9	6.380 21.769	185	191	1,16
	- -	-	-	-	-	-	-	-	-	-