


## MP 145












230 V / 50 Hz
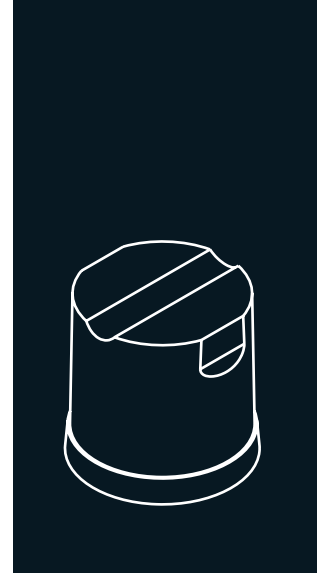
### SELF-CONTAINED ICE CUBE MACHINE

#### FEATURES CARACTERÍSTICAS

- ▶ **PRODUCE SOLID GOURMET CRYSTAL CLEAR ICE CUBES.**  
PRODUCE CUBITOS GOURMET MACIZOS Y CRISTALINOS.
- ▶ **FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES**  
CONCEPTO FRONT VENTILATION: VENTILACIÓN FRONTAL IN-OUT QUE PERMITE LA INSTALACIÓN ENCASTRADA DE LA MÁQUINA.
- ▶ **STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.**  
PUERTA MÁS SÓLIDA EN EL MERCADO. HECHA DE ACERO INOXIDABLE. SISTEMA DE APERTURA Y AMORTIGUACIÓN PATENTADO POR ITV.
- ▶ **AUSENCIA DE DUCHAS Y ASPERSORES, BOMBAS DE AGUA NI RETENES DE AGUA.**  
ABSENCE OF SHOWERS AND SPRINKLERS, WATER PUMPS OR WATER SEALS.
- ▶ **THE TURBINE SYSTEM, PATENTED AND APPLIED EXCLUSIVELY BY ITV. WITHOUT PUMPS OR INJECTORS OR ELECTRONICS, ITS REVOLUTIONARY PROPULSION SYSTEM PERMANENTLY REMOVES THE EFFECTS OF WATER'S LIMESCALE ON THE MACHINE.**  
EL SISTEMA DE TURBINA, PATENTADO Y APLICADO EN EXCLUSIVA POR ITV. SIN BOMBAS, NI INYECTORES NI ELECTRÓNICA, SU REVOLUCIONARIO SISTEMA DE PROPULSIÓN ELIMINA DEFINITIVAMENTE LOS EFECTOS DE LA CAL DEL AGUA SOBRE LA MÁQUINA.
- ▶ **AISI 304 STAINLESS STEEL FRAME.**  
CARROCERÍA EN ACERO INOXIDABLE AISI 304.
- ▶ **TROPICALIZED MACHINES (T CLASS).**  
MÁQUINAS TROPICALIZADAS (CLASE T).



	 24 H	 10°C	 10°C	 21°C	 15°C	 (Kg)	 (mm)	 (mm)	
MP 145 A		145	140	-	-	-	Width 685 Depth 555 Height 870*	Width 777 Depth 645 Height 958	<b>PULSAR 34GR</b> 38 (Ø) x 38 mm (H) Average dimensions Dimensiones promedio
MP 145 W		145	140	-	-	-			

\* WITH LEGS 950 CON PATAS 950

#### ACCESSORIES ACCESORIOS

##### INCLUDED



**WATER INLET HOSE**  
MANGUERA DE ENTRADA DE AGUA



**WATER OUTLET HOSE**  
MANGUERA DE DESAGÜE



**WATER INLET FILTER GASKET**  
JUNTA DE FILTRO DE ENTRADA DE AGUA

##### NOT INCLUDED (OPTIONAL)



**ANTI-LIMESCALE FILTER**  
FILTRO ANTICAL



**C4 WATER SOFTENER**  
DESCALCIFICADOR C4



**ANTI-LIMESCALE + ANTI-CHLORINE FILTER CS101**  
FILTRO ANTICAL + ANTICLORO CS101



**CALKLIN 50 CLEANER**  
PRODUCTO ANTICAL



**PARTICLE FILTER**  
FILTRO ANTIPARTÍCULAS



**ANTI-CHLORINE FILTER**  
FILTRO ANTICLORO



MP 145

FRONTAL VIEW  
VISTA FRONTAL

LEFT SIDE VIEW  
VISTA LATERAL IZQUIERDA

\* All measurements in mm.  
\* Todas las cotas en mm.

OPERATING CONDITIONS CONDICIONES DE TRABAJO

PRODUCTION 50Hz PRODUCCIÓN 50 Hz


±10% V

5°C/43°C

5°C/35°C

1 bar/6 bar

84 Ice cubes/cycle



V	Hz	ph
230	50	1N

MP 145 AIR COOLED

°C °F	10° 50°	15° 60°	21° 70°	30° 86°
	10° 50°	145	143	140
21° 68°	142	140	138	134
32° 90°	137	135	132	130
43° 109°	134	131	130	126

MP 145 WATER COOLED

°C °F	10° 50°	15° 60°	21° 70°	30° 86°
	10° 50°	145	143	140
21° 68°	142	140	138	134
32° 90°	137	135	132	130
43° 109°	134	131	130	126

MODELS  
MODELOS

MP 145 A

MP 145 W

	+c° -c°	ASHRAE CONDITIONS CONDICIONES ASHRAE (W) (BTu/h)	(W) 43°C	(n.) (mm²)	FUSE	100 Kg (Kwh)	(l/h)	HEAT REJECTED (W) (BTu/h)	(Kg)	(Kg)	(m³)			
MP 145 A		-	-	950	3	1,5	10	-	-	1932	6588	103	110	0,48
MP 145 W		-	-	950	3	1,5	10	-	-	1932	6588	103	110	0,35



ITV ICE MAKERS, S.L.  
POL. IND. SECTOR 13, AVDA. DELS HOSTALERS, 2  
46394 RIBARROJA DE TURIA, VALENCIA, SPAIN  
PHONE: +34 96 166 75 75 | FAX: +34 96 166 81 00  
info@itv.es | www.itv.es



SERVICE  
SERVICIO ASISTENCIA TÉCNICA  
service@itv.es  
Skype: ITV.Service  
+34 961 667 639  
8:00AM | 7:00PM



Subject to certain limitations  
and exclusions. Only spare parts.  
Sujeto a limitaciones y exclusiones.  
Solo piezas de repuesto.

